



*Quality Products, Exceptional Service,
Outstanding People*

Spectra® Chain Link



Spectra® Color Chain Link... made to perform

Spectra® is the latest generation of Master Halco's residential, commercial and industrial chain link fence systems. It provides the corrosion protection of zinc, with the durability and attractive appearance of a colored polyester framework and extruded PVC fabric, to ensure years of attractive and reliable performance that blends in beautifully with the environment.

Pets



Parks



Property Lines



Our Spectra® Fencing System

Premium quality frame and fabric is guaranteed for 15 years.



15 Year Warranty

Features and Benefits:


- Zinc-coated steel framework is thoroughly cleaned during the pre-treatment process, then color coated with a 3 mil minimum polyester layer for protection from corrosion.
- All galvanized wire has a 15 mil minimum extruded polyvinyl chloride coating for dual protection from corrosion and the elements.
- Fittings are made of galvanized steel with a 3 mil minimum of polymer layer for protection from corrosion.



Residential



Schools

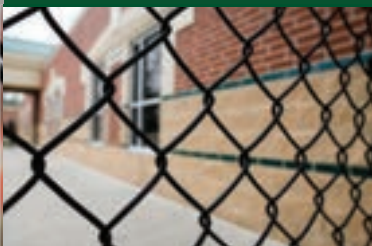


Privacy Fencing



Available Colors

Choose from 3 serene colors that blend in perfectly with the environment. Spectra® defines property lines, and will add value to any residential or commercial property.



Midnight Black




Forest Green



Sierra Brown

Available Mesh Sizes

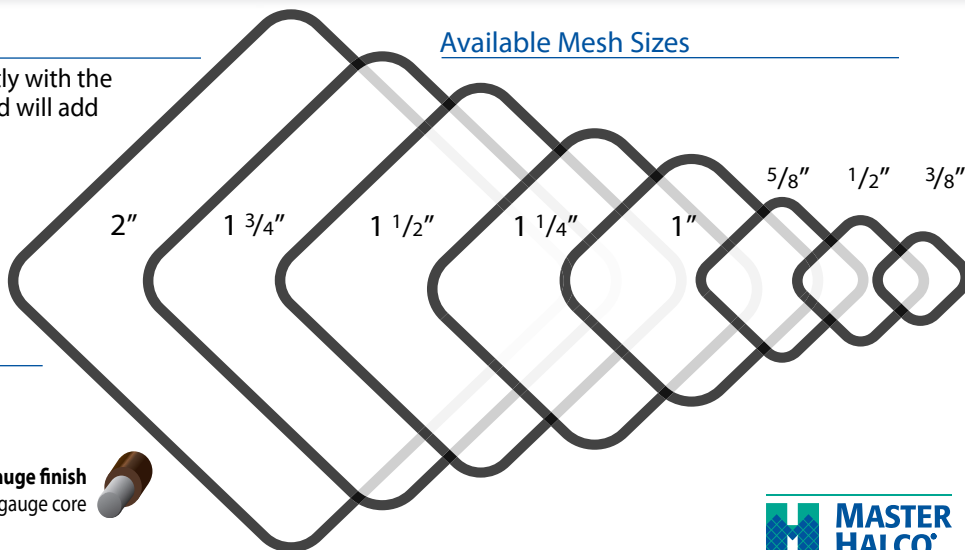

Available Wire Gauges (Finish and Core)

Use the finish gauge number when ordering.

6 gauge finish

9 gauge core



8 gauge finish

11 gauge core



9 gauge finish

13 gauge core



11 gauge finish

14 gauge core



Spectra® Color Chain Link Recommendations

FABRIC

Spectra® polyvinyl chloride extruded over zinc-coated steel core wire.

FRAMEWORK - TYPE 2

Spectra® polyester resin, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1C, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM 1043, external coating Type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film.

Type 2 Residential

Fabric Gauge	9 gauge and 11 gauge finish
Fabric Mesh	1-1/4", 1-1/2", 1-3/4", and 2"
Fabric Height	3', 42", 4', 5', and 6'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6'.

Type 2 Commercial

6 gauge, 8 gauge, and 9 gauge finish 6 gauge is not available for 3/8" mesh or 1/2" mesh
3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Knuckle - Knuckle (KK) for 5' and under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.

Top Rail	1-3/8" O.D. Spectra® 17 Gauge or 16 Gauge
Line Posts	1-5/8" O.D. Spectra® 17 Gauge or 16 Gauge
Terminal Posts	1-7/8" O.D. Spectra® 16 Gauge 2-3/8" O.D. Spectra® 16 Gauge

1-5/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
1-7/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe 2-3/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
2-3/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe 2-7/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe 4" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe

Gates

Fabric	Same Gauge and Mesh as Chain Link Selected
Frame	Same as Top Rail Selected

Fittings

Tension and Brace Bands	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel
Caps, Eye Tops, Rail Ends	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum
Sleeves	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel
Tie Wires	Polymer Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire

Slats - Privacy

Material Composition	Polyethylene Thermoplastic
Colors	Green, Black, Brown, Gray, Redwood, Blue, Desert Sand




Quality Products, Exceptional Service,
Outstanding People

MasterHalco.com | 888-MH-Fence

Branch service centers are located
throughout North America.

MH Digital ©9/18

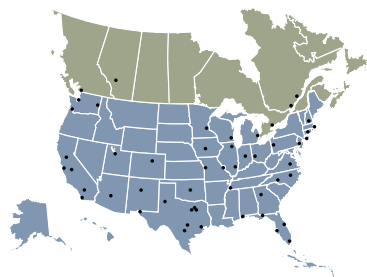

Available from: